

Series CHP

Pre-Pinched, Enclosed Construction, Hand Wheel Operated

- Low pressure drop
- Linear throttling characteristic
- No packing
- Drop tight closure
- High efficiency stainless steel ACME stem for easy operation
- Available with optional limit switches
- Simple rugged cast iron construction



Specifications:

- Flanges: ANSI STD 125/150 lbs.
- Housing: Cast Iron, ASTM A48, Class 35 (Valve Sizes Up to 10")
Ductile Iron, ASTM A536-80, Class 65-45-12 (Valve Sizes 12" & Up)
- Stem: 303 Stainless Steel
- Pinch Bar: 303 Stainless Steel
- Bearing: Bronze Alloy



Options:

- Sleeve Elastomer
- Epoxy Paint
- ANSI STD 300 lbs Flange
- 316 Stainless Steel Stem
- Ductile Iron Housing
- Stem Cover Assembly
- Secondary Containment Package
- Limit Switches
- Chain Wheel
- Bevel Gear Box

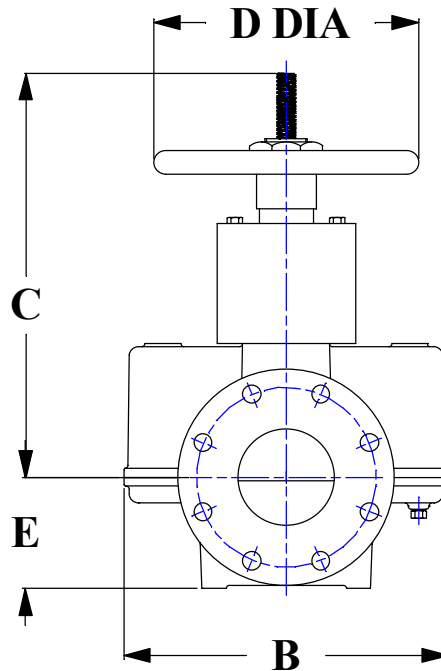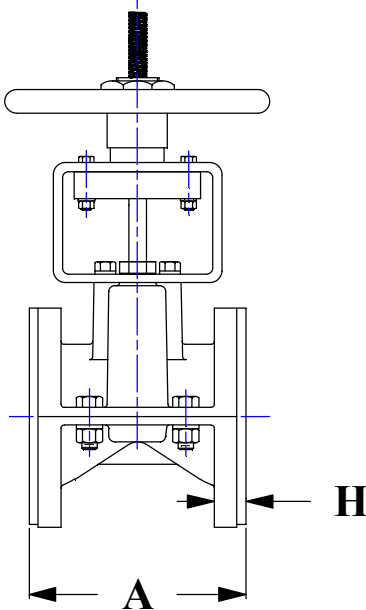

All dimensions are in inches.

SIZE	4	6	8	10	12	16
A	9.00	17.75	21.37	26.50	29.00	32.00
B	13.50	20.12	22.75	26.25	32.00	40.50
C	16.80	20.74	26.93	29.74	36.49	44.33
D Dia	12.00	18.00	22.00			36.00
E	4.62	5.75	7.00	8.25	9.75	16.12
H	1.31	1.87	1.62	1.81	2.25	3.37
P Max	150 psi			100 psi		
Wt, lb	100	225	232	450	600	680

Dimensions are subject to change without notice.